



Use these three mounting holes

Install Isolation blocks using the 10mm allen bolts








Install lower isolation block and triangulation rod as shown. Use longest 8mm bolt provided



Install bracket to upper isolation blocks as shown



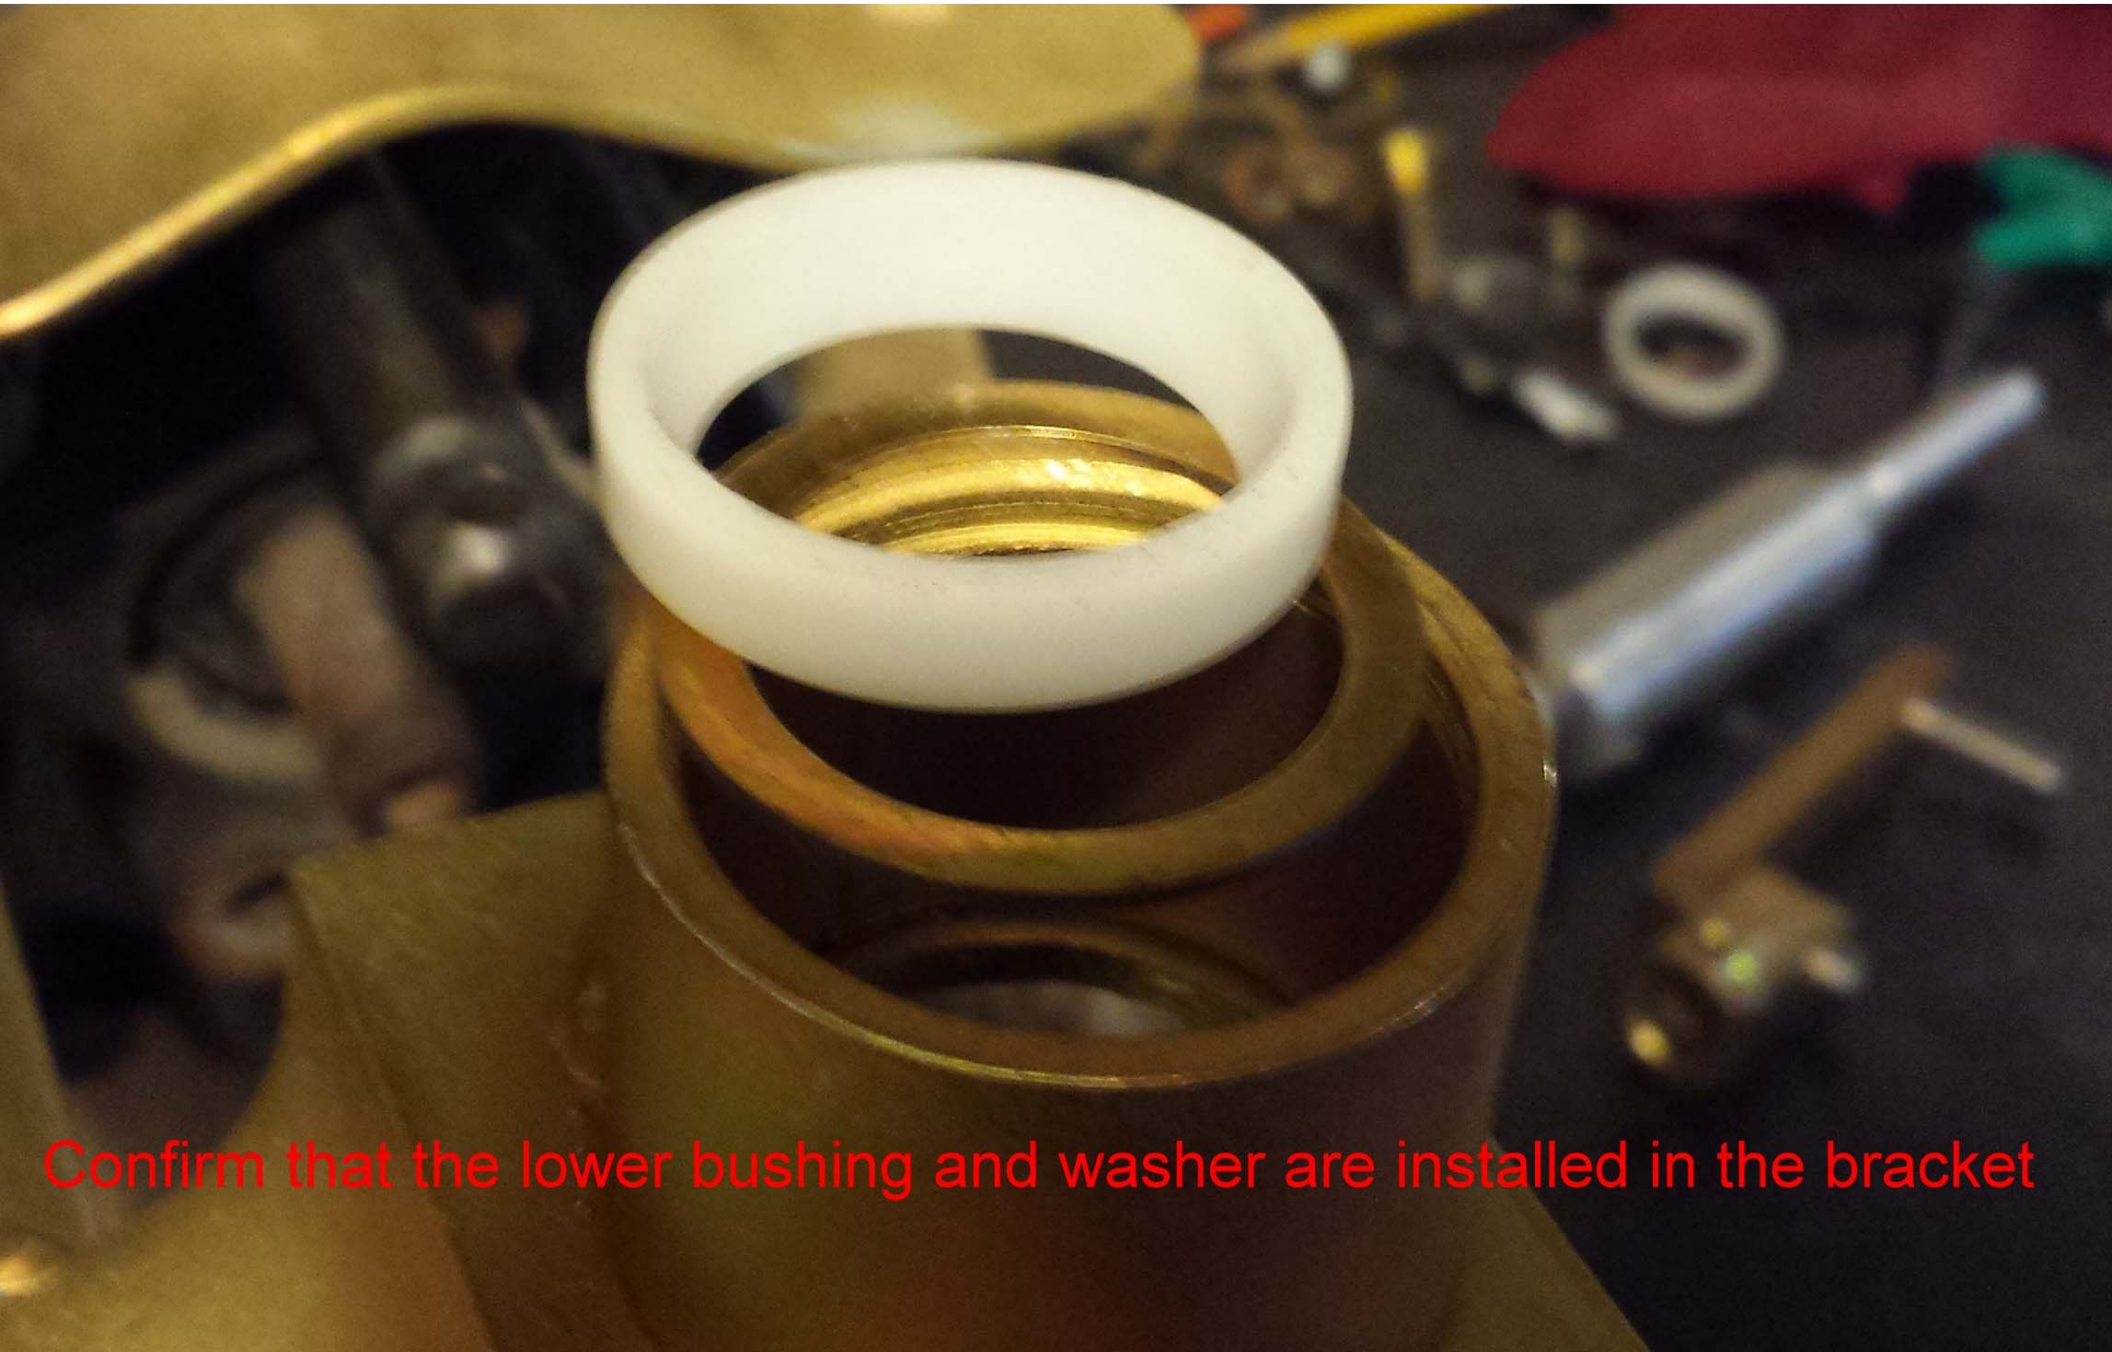

Confirm that the lower bushing and washer are installed in the bracket



Thread spring between upper bushing and steel washer as shown



Install lever in bracket and connect selector rod to lever as shown. Rod is on the left as shown.





connect selector rod to transmission  
Clip lever in cup. Tighten all fasteners





when clipping lever into cup observe  
the order as follows from top to bottom  
1.circlip 2.steel washer 3.Spring  
4. nylon half cup